


CEE Wall mounted plugs

Wall mounted plug IP44

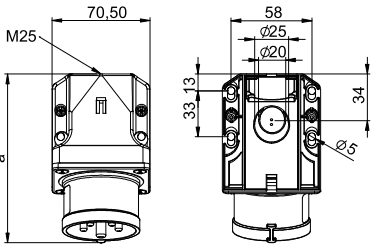


angle=15°

	16 Amp			32 Amp		
	3	4	5	3	4	5
Poles	3	4	5	3	4	5
a [mm]	120	121	122	131	131	132
Height [mm]	76	76	79	82	82	85
M [mm]	25	25	25	25	25	25
Wire flexible [mm²]	1-2,5			2,5-6		
Wire solid [mm²]	1-4			2,5-10		
Contact screws [Ncm]	100			110		
Weight [g]	173	188	205	212	232	253

- with screw terminals
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 515-6v
- top and rear entry
- incl. threaded cable grommet

IP44 splashproof

Wall mounted plug IP44 TT

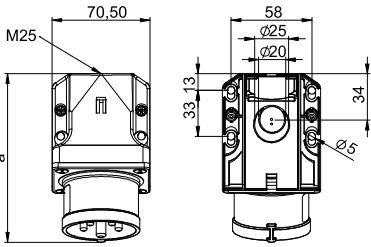


angle=15°

	16 Amp		32 Amp	
	3	5	4	5
Poles	3	5	4	5
a [mm]	120	122	131	132
Height [mm]	76	79	82	85
M [mm]	25	25	25	25
Wire flexible [mm²]	1-2,5		2,5-6	
Wire solid [mm²]	1-4		2,5-10	
Weight [g]	176	209	238	261

- screwless connection technology
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 515-6TTv
- top and rear entry
- incl. threaded cable grommet

IP44 splashproof

Wall mounted plug with lid IP44

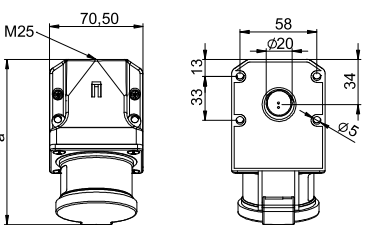


angle=15°

	16 Amp			32 Amp		
	3	4	5	3	4	5
Poles	3	4	5	3	4	5
a [mm]	127	128	128	137	137	140
Height [mm]	92	94	97	99	99	104
M [mm]	25	25	25	25	25	25
Wire flexible [mm²]	1-2,5			2,5-6		
Wire solid [mm²]	1-4			2,5-10		
Contact screws [Ncm]	100			110		
Weight [g]	230	245	263	272	292	316

- with screw terminals
- with hinged lid
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 515-6dv
- top and rear entry
- incl. threaded cable grommet

IP44 splashproof

Wall mounted plug with lid IP44

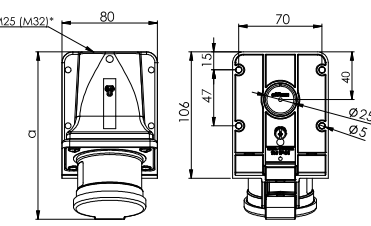

angle=15°

	16 Amp		32 Amp	
	5		5	
Poles	5		5	
a [mm]	141		151	
Height [mm]	99		112	
M* [mm]	25		25	
Wire flexible [mm²]	1-2,5		2,5-6	
Wire solid [mm²]	1-4		2,5-10	
Contact screws [Ncm]	100		110	
Weight [g]	257		310	

- with screw terminals
- **one-piece housing**
- with hinged lid
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 515-6kdv
- top and rear entry
- incl. threaded cable grommet

IP44 splashproof

*M32 optional on request available

