

## TECHNICAL INFORMATIONS

# ARMADURA SMD IP65

## 56W 5000K

Armadura em policarbonato com placa LED PCB, proteção IP65, PF >0.9 e várias potências para diferentes alturas de instalação.

Polycarbonate Luminaire with LED PCB board, IP65, PF >0.9 protection and various powers for different installation heights.

Armadura en policarbonato con placa LED PCB, protección IP65, PF >0.9 y varias potencias para diferentes alturas de instalación.




### ILAR-01106


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Led Type	SMD	Dimensions (L x W x H)	1500x100x70mm	Total Luminous Flux	6720lm
Body Material	PC/PC	Weight	1.65kg	Luminous Efficacy	120lm/W
Fixings	CLIP	Volume	105dm <sup>3</sup>	Beam Angle	120°
Housing Colour	Grey			Colour Temperature	5000K
Nominal Lifetime (EOL end of life)	40000h			Colour Rendering Index	>80
Dimmable	No			Colour Consistency	<= 6

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	56W	Energy Label	A+	CE	YES
Nominal Voltage	220-240V	Energy Consumption KWH/1000H	-	ROHS	YES
Operating Frequency	50/60Hz	Type of Protection	IP65	ENEC	-
Power Factor	0.96	Protection Class	Class II	Warranty	3 YEARS
Starting Time 100% ON	0.01S	Protecion Class IK (shock resistance)	IK08		
ON/OFF Cycles	>15000				
Operating Temperature	- 25° C to + 40° C				

### SIZE

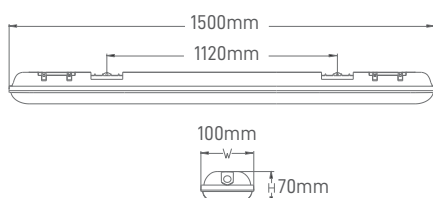

### BEAM ANGLE

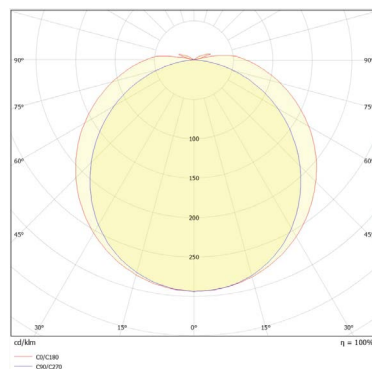

Designed by Aronlight in Portugal. Made in PRC

